


## Custom Data

Custom data allows you to add data to mSupply that doesn't naturally fit into one of the existing fields.

- Choose **Special > Show custom data...** to show the list of custom data sets.

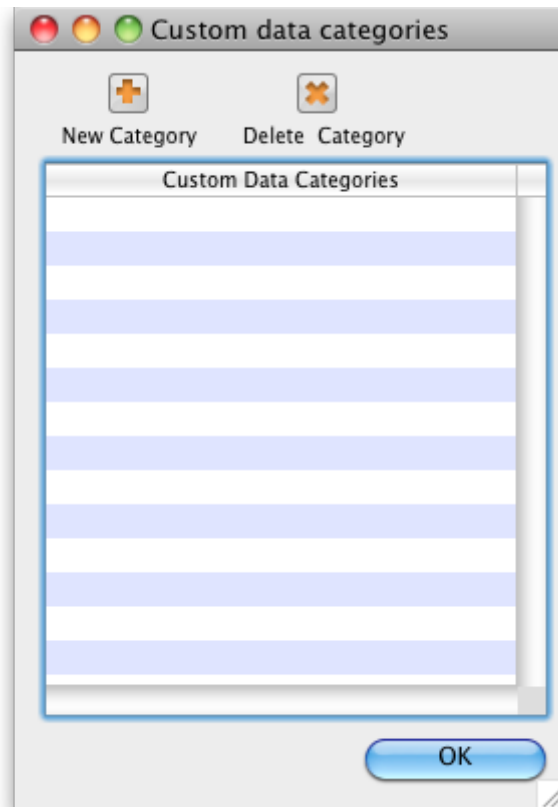

## Setup Fields

- Click **New**
- This window is shown:

Category Name:

| Field  | Visible                             | Field label |
|--------|-------------------------------------|-------------|
| real_1 | <input type="checkbox"/>            | real_1      |
| text_1 | <input checked="" type="checkbox"/> | text_1      |
| date_1 | <input checked="" type="checkbox"/> | date_1      |
| real_2 | <input checked="" type="checkbox"/> | real_2      |
| text_2 | <input type="checkbox"/>            | text_2      |
| date_2 | <input type="checkbox"/>            | date_2      |
| real_3 | <input type="checkbox"/>            | real_3      |
| text_3 | <input type="checkbox"/>            | text_3      |
| date_3 | <input type="checkbox"/>            | date_3      |
| real_4 | <input type="checkbox"/>            | real_4      |
| text_4 | <input type="checkbox"/>            | text_4      |
| date_4 | <input type="checkbox"/>            | date_4      |


Buttons: Cancel, OK

- For our example, we're going to record population in several regions each year, so we need
  - A real number field to store the population number
  - A text field to store the region name
  - A date field to store the year
- We've labelled the data set *RegionalPopulations*
- To change the field names, click once on the name, and then wait a second or two and click again- now it is editable:

|                                     |            |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Region     |
| <input checked="" type="checkbox"/> | Date       |
| <input checked="" type="checkbox"/> | Population |

## Adding data

- Click the **data** tab then click **New**

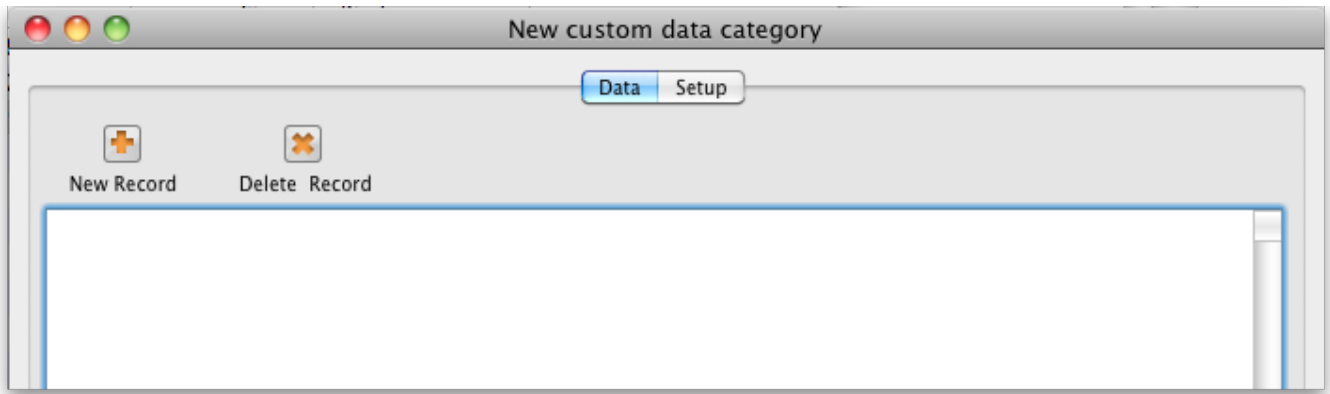

## Using data in reports

- You can extract data by using the following method in a pagepro report
- `custom_value_get("data_set";"field_to_query";"search_value";"field_to_return";"variable_to_return")`
  - "data\_set" is the name of the data set. e.g. "RegionalPopulations"
  - field\_to\_query is the internal name of the field "text\_1", "Text\_2", "real\_2", "date\_7"
  - "search\_value" is the value you're looking for in "field\_to\_query"
  - "field\_to\_return" is the field name of the value to return
  - "variable\_to\_return" is a pointer to the variable that will contain the data returned.
- Sound too complicated? We usually build these reports for clients, but this documentation is for the technically minded who want to build their own.

// Previous: [Virtual stores](#) Next: [FrontlineSMS Integration](#)//

From:

<https://docs.msupply.org.nz/> - **mSupply documentation wiki**

Permanent link:

[https://docs.msupply.org.nz/other\\_stuff:custom\\_data?rev=1499116613](https://docs.msupply.org.nz/other_stuff:custom_data?rev=1499116613)

Last update: **2017/07/03 21:16**

